

Details of installation

Installation of main bar

1.Firstly, please confirm how many installation holes the projector has? 3 or 4

2.If there are 3 holes, the installation arms need to be taken apart from Installation bracket firstly. Connect 3 installation arms to the projector, and then connect the installation arms to the installation base However, the installation base needs to be the center of projector. Figure 10.

3.Connect the installation arms to the projector conversely if the distance of installation holes is less than 120mm. Connect the installation arms to the installation base via sliding installation button as figure 11

4.Rotate the adjustable screw for adjusting the height of instillation arms if the installation holes are not at the same level as figure 12.

5.The front or back of adjuster must be parallel to the surface of projector as figure 13.

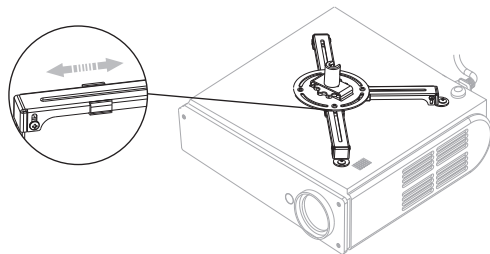


figure 10




figure 11




figure 12

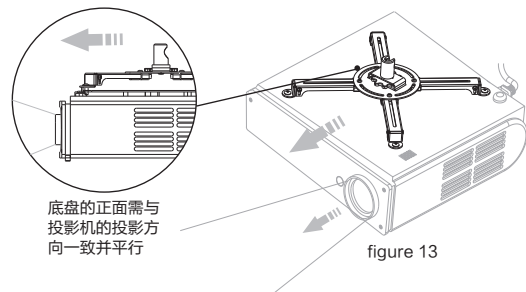


figure 13

底盘的正面需与
投影机的投影方
向一致并平行

Installation

- ④ (Figure14)With the projector installed to the installation base: From the side, insert the joint to the installation base
(Figure15)Adjust to a desirable angle and direction, then tighten up the main screw from the bottom.

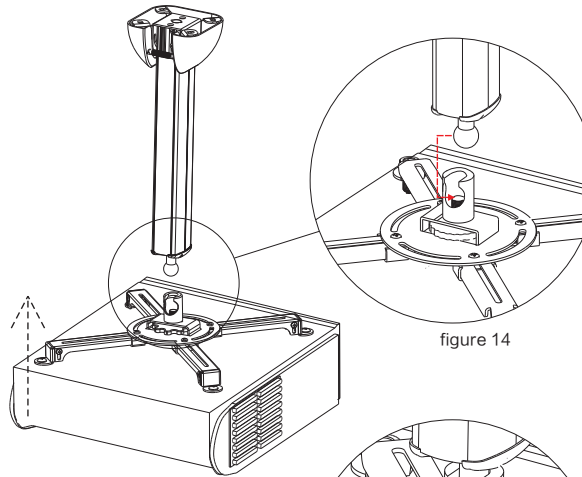


figure 14




figure 15

GRANDVIEW®
GRANDVIEW REPRODUCING GENUINE COLORS


Instruction Manual

Projector Lift

Applicable Model
GPCQ-X

Please read before using

Thank you for purchasing our products. Please read the instruction manual carefully in order to ensure this projector lift is suitable for your projection equipment.

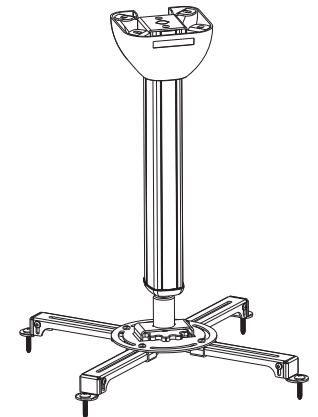

Cautious



Warnings

For safety, the minimum weight of ceiling must be 5Kg



Weight

The maximum weight of installation bracket is 5Kg



Caution

Do not over incline the projector.



Do not take apart

Do not take apart any components of the projector lift.

Grandview Crystal Screen Canada Ltd.

#11- 3751 North Fraser Way,
Marine Way Business Centre,
Burnaby, BC, Canada V5J 5G4
Tel: 1-604-412-9777
Fax: 1-604-412-9796
Website: www.grandviewscreen.ca

Guangzhou Grandview Crystal Screen Co., Ltd.

P.O. 511400 Federal Ind. Zone No. 363,
Yushan West Road, Shiqiao, Panyu
District, Guangzhou, Guangdong, China
Tel: +8620-8489-9499
Fax: +8620-8480-3343
Website: www.grandviewscreen.com


Parts

GPCQ-X

- A – Main bar
- B – Pillar base
- C – M5 x 15 screw (column)
- D – Top cap
- E – Spring
- F – Ø5x22 cross screw
- G – Installation base
- H – Extension arms
- I – Manual adjustable tightening knob

Accessories:


- 1/ M6 x 25 anchor screw (4 set)
- 2/ Ø6 x 50 wood screw (4pcs)
- 3/ M5 x 8 Philip screw (8 pcs)
- 4/ M4 x 8 Philip screw (4pcs)
- 5/ M3 x 8 Philip screw (4pcs)
- 6/ Hexagon screw (1pc)
- 7/ Tightening tool
- (1pc for installation base and the joint)
- 8/ Plastic belt

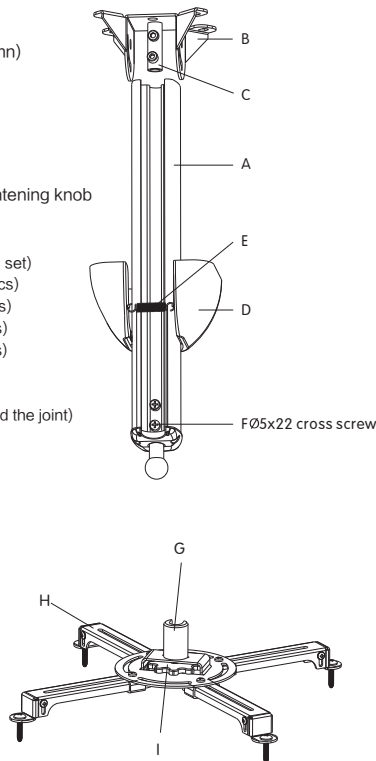

Scope

The total height of GPCQ-X is 750mm

The main bar (together with the plastic cover) can be cut by user into desirable height.



Installation

- 1** Fixation on the ceiling
(Figure 1) Locate the desired position of the concrete ceiling, install the pillar base onto it.
(Figure 2-3) Insert the main bar into the pillar base, then tighten it up by using M6x25 anchors screws. (Remark: it must be firmly tightened because it is the main supporting unit.)




figure 1




figure 2




figure 3

Installation

- 2** Cable management
(Figure 4, 5) Place the cable into the cable duct on the back, close it with the plastic cover.
(Figure 6) Insert in the top cap to the main bar, then fasten with the added spring.

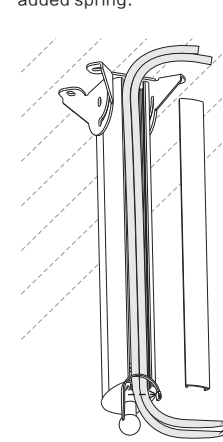


figure 4




figure 5




figure 6

- 3** Installation of the projector
(Figure 7) Position the arms on the installation holes of the projector. The arms are adjustable from the installation base.
(Figure 8) Please try to position the installation base on the center of projector.
(Figure 9) Tighten the screws.




figure 7




figure 9




figure 8


Scope

Scope for installation (Installation hole of projector):


Maximum scope for installation: 310mm diameter

Minimum scope for installation: 40mm diameter

Note: Connect the installation arms to the projector conversely for different installation holes of projector.



Maximum diameter: 310mm



Minimum diameter: 40mm