



S2 Projector Mount

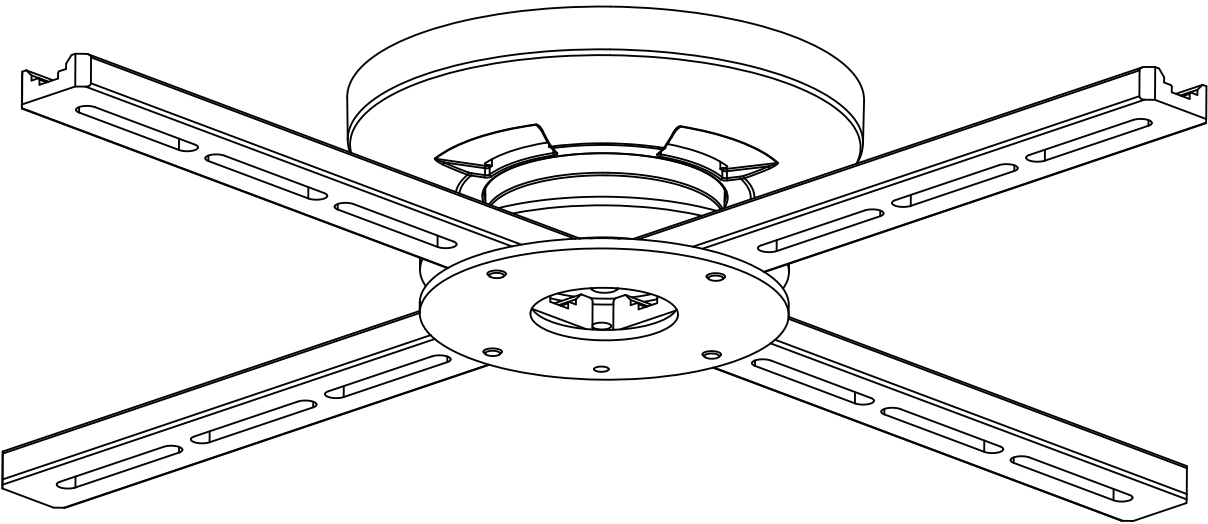


Installation Steps


1. Fix the mounting bracket.

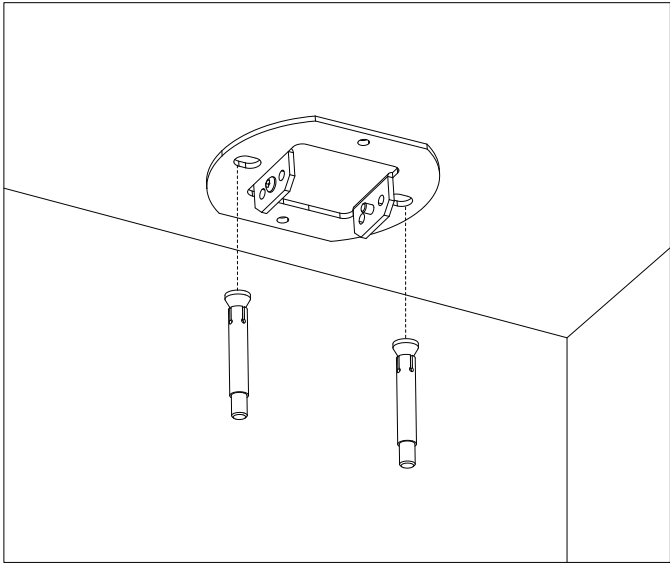


3. Hang the claws and projector into the mounting bracket.

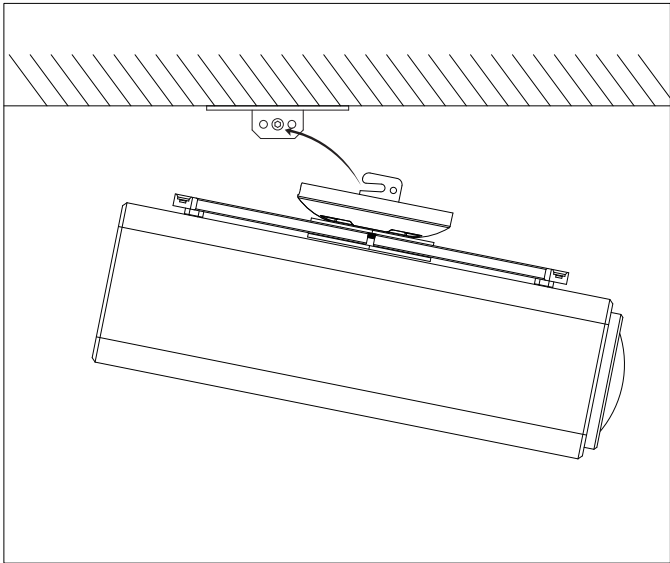


5. Adjust the angle of the projector.

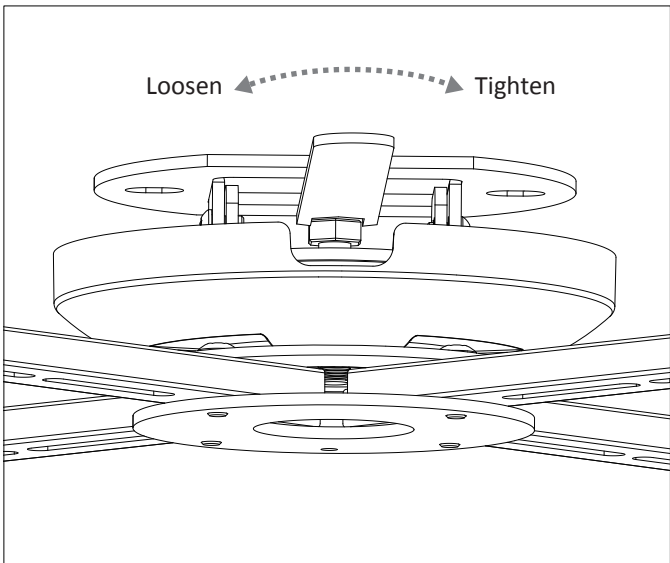


2. Fix the projector with the claws.

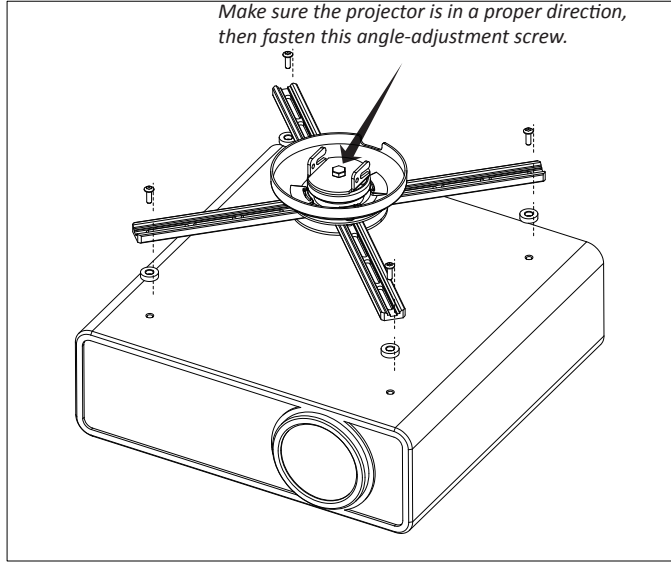

4. Tighten the screws.

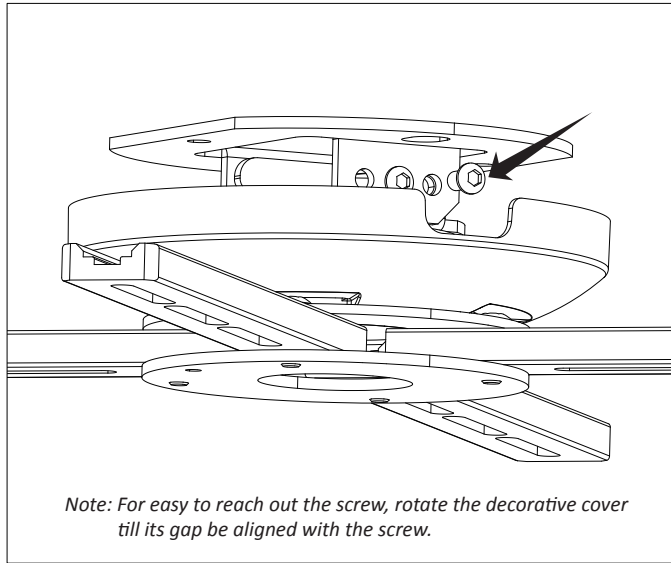

6. Adjust the decorative cover.

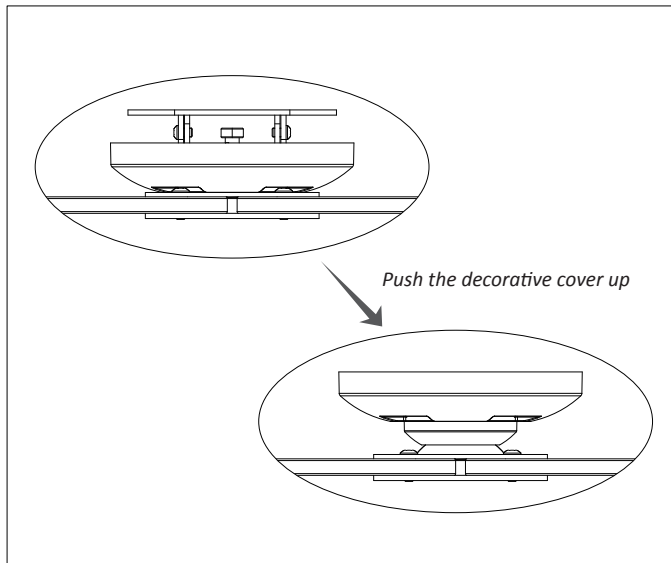

625 (mm)

286

Hole Distance (mm)

286

124

404

Yaw 360°

Load capacity: 20kgs

Roll/Pitch 20°

Part List

Mounting Bracket	X1
Claws	X1

- * Round head hexagonal screw M5*8 X8
- * Flat head hexagonal screw M4*20 X8
- * Plastic washer X8
- * Hex wrench X1
- * Open spanner (Short) X1
- * Open spanner (long) X1
- * Expansion screw M10*60 X2