

Self-Rising Screen





ALR Screen

Without ALR

Here's what ALR can do for you

Ambient Lights affect the image quality and show glare on your screen? ALR technology is suitable when you have some control of the lighting in the room during the day, it delivers exceptionally clear images even in brightly lit surroundings.



Screen height adjustment



Support AMX, RS485 connection



Microporous sound under black edge



A new way to open your private home theater.

Unboxing to operate. No need to install it, you can move it at will. It supports floor mount style, hidden in a variety of display ways, with no more holes in the wall.



Flatness

drives a double v-shaped structure bracket, with uniform force, to avoid stretching deformation of the fabric.

Tab-Tensioned Screen for Ultra Short Throw Projectors

Self-Rising Motorized Screen—AD series

Unboxing to operate. No need to install it, you can move it at will. It supports floor mount style, hidden in a variety of display ways, with no more holes in the wall. A new way to open your private home theater. If you don't want a fixed frame screen or ceiling-mounted electric screen, then the Motorized ALR floor screen will be the ideal option.



Materials

- Ambient Light Rejecting (ALR) Screen-SP
- Designed for Short-Throw and Ultra-Short-Throw (UST) laser projectors (Throw Ratio < 1.0)
- Applicable Environment: daylight, indoor light, ceiling light, etc

Size

16:9-100" | 110" | 120" | 135" | 150"

Max: 150" (130.7" x 73.5") in 16:9

Motor


Silent tubular motor, certificated by UL, 3C.

Control System

- 868MHz RF remote control
- Wireless Sync-Trigger
- Support AMX, RS485 connection

Color


White | Black

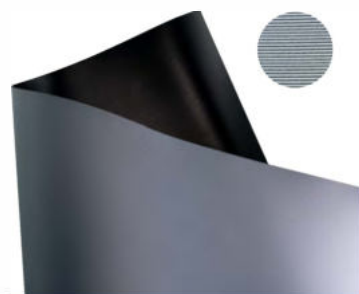

ALR
93%

Gain
0.85

Viewing Angle
178 °

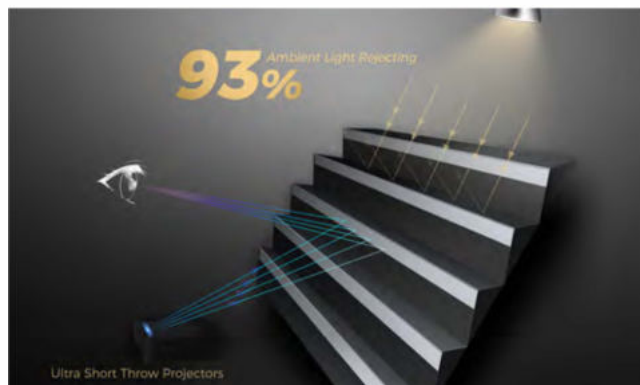

Electric Floor Rising ALR Screen - AD

FORMAT	DIAG.SIZE	VIEWING SIZE	BLACK BORDER			SCREEN OVERALL LENGTH	SCREEN OVERALL HEIGHT	PACKAGE DIMENSIONS	APPROX. WEIGHT
	D	(WxH)	(B1)	(B2)	(A)	L	B	W1xH1xL1	Kg
16:9	92 "	2037 x 1143	35	400	55	2272	1578	235x235x 2332	31.60
	100 "	2214 x 1245	35	400	55	2449	1680	235x235x 2509	33.37
	106 "	2346 x 1320	35	400	55	2581	1755	235x235x 2641	35.12
	110 "	2435 x 1370	35	400	55	2670	1805	235x235x 2730	36.02
	120 "	2656 x 1494	35	400	55	2891	1929	235x235x 2951	38.28
	135 "	2988 x 1681	35	400	55	3223	2116	235x235x 3283	42.02
	150 "	3320 x 1868	35	300	55	3555	2253	235x235x 3615	45.57

