

TENSIONED PROJECTION SCREENS

electric screens with side tensioning system

Electric projection screens TENSIONED: elegant and silent, they fit perfectly to any type of environment, suitable for domestic application as well as business ones. The side tensioning system consists of strong and high quality elastic cords that, passing through the eyelets, along the sides of the canvas, create a lateral curvature of the surface that preserves the fabric from the risk of folds in the rolling up phase despite the presence of the eyelets .


PROJECTION









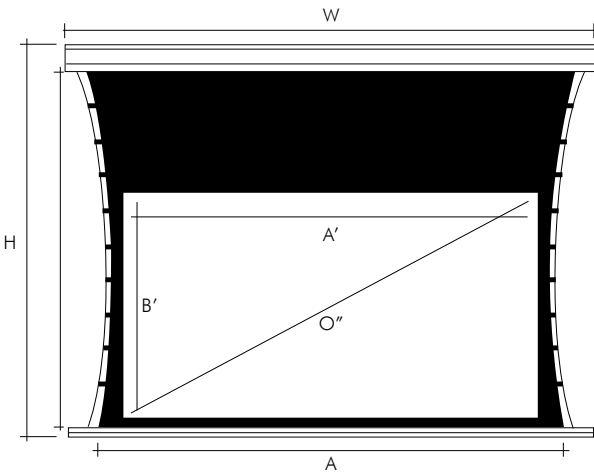


















Legenda

- Code
- Ratio
- Screen size (AxB)
- Viewing size / inches (A'xB'/O")
- Viewing size (A'xB')
- Total screen size (WxH)
- Total size closed
- Min-max total size
- Screen case size
- Counterweight size
- Top extra drop
- Max extra top drop
- Lumens
- Max load
- Distance
- Run
- Fixing
- Arm
- Tilt
- Joints
- Pieces
- Cable management
- Volume
- Projector case
- Packing
- Net weight
- Gross weight

Technical Features

- Screens** realised with the following projection fabric SOFT WHITE, SOFT MATT WHITE, SOFT WHITE TRANSOUND, SOFT GREY (see technical data sheet at pages 1-2-3)
- Available** in the following formats: square 1:1, video 4:3 e HDTV 16:9, **with or without outer black borders of 5 cm and upper black drop** of variable height: the black edging increases the definition of the image projected on the screen
- Screen lowering from the rear side of the box**, on demand it can be provided with front lowering system
- Side tensioning system** by strong and high quality elastic cords that pass through the eyelets along the sides of the canvas, starting from the bottom, creating a side arm that preserves the fabric from the risk of folds in the rolling up phase despite the eyelets.
- Extruded aluminium case, epoxy powder coated, in white** RAL 9010 colour, section mm 121x114mm, on the lower side a longitudinal slot with rounded edges allows the descend of the projection screen.
- Internal silver anodized aluminium tube for fabric wind up**
- \varnothing 61 mm or \varnothing 80 mm, which includes a reliable electric motor mounted on special rubber silent blocks.
- Powerful electric motor, single phase**, IMQ, CE mark, **5-years guarantee** from purchasing date, power supply 200V-50-Hz, absorption 0,5A, protection IP 44, 17 RPM., on the standard version the motor is mounted on the right hand side.
- Screen up and down electric inverter, standard supplied**
- Screen up and down limit switches factory adjusted**, possibility of different settings if necessary. The screen can also be stopped at intermediate height by pressing the electric inverter switch
- The screen housing end caps** are in galvanized metal, epoxy powder coated, in white colour RAL 9010
- Counterweight** with nice design in **white** colour
- Robust individual packing** in double cardboard type volcano
- Product CE certified, 12 month warranty** to the conditions indicated on the manual
- Accessories on demand**: external radio remote control, integrated radio control, spacing wall brackets



																											
682701	TENSIONED 168x129	4:3	168x129	158x119/78"	200x144	199,4x12	198x3,5	5	40	220x15x18	12	15															
683601	TENSIONED 218x166	4:3	218x166	208x156/102"	250x182	249,4x12	248x3,5	5	40	270x15x18	15	18															
683801	TENSIONED 248x189	4:3	248x189	238x179/117"	280x204	279,4x12	278x3,5	5	65	300x15x18	20	23															
684101	TENSIONED 268x209	4:3	268x209	258x194/127"	300x224	299,4x12	298x3,5	10	65	320x15x18	25	28															
687601	TENSIONED 318x246	4:3	318x246	308x231/152"	350x262	349,4x12	348x3,5	10	65	370x15x18	28	33															
682401	TENSIONED 168x99	16:9	168x99	158x89/71"	200x114	199,4x12	198x3,5	5	40	220x15x18	11	12															
683101	TENSIONED 218x127	16:9	218x127	208x117/94"	250x143	249,4x12	248x3,5	5	40	270x15x18	14	17															
683701	TENSIONED 268x160	16:9	268x160	258x145/117"	300x176	299,4x12	298x3,5	10	65	320x15x18	23	26															
687301	TENSIONED 318x188	16:9	318x188	308x173/139"	350x204	349,4x12	348x3,5	10	65	370x15x18	26	31															
682601	TENSIONED 168x168	1:1	168x168	158x158/88"	200x184	199,4x12	198x3,5	5	65	220x15x18	12	15															
682801	TENSIONED 188x188	1:1	188x188	178x178/99"	220x204	219,4x12	218x3,5	5	65	240x15x18	13	16															
683201	TENSIONED 208x208	1:1	208x208	198x198/110"	240x224	239,4x12	238x3,5	5	65	260x15x18	15	18															
684001	TENSIONED 248x248	1:1	248x248	238x238/133"	280x264	279,4x12	278x3,5	5	65	300x15x18	20	23															
687801	TENSIONED 268x273	1:1	268x273	258x258/144"	300x289	299,4x12	298x3,5	10	65	320x15x18	25	28															

Size, in cm, weights expressed in kilograms, diagonal expressed in inches (")