


VIDEOLIFT - VIDEOLIFT HT BRACKET

for projectors, with pantograph opening system

VIDEOLIFT bracket is a motorized bracket suitable to anchor any type of video-projector to the ceiling. It can be completely hidden into the false ceiling as the panel, removed for installation, can be fixed to the bottom. Its anchoring system allows an optimal adjustment, also in the presence of some level flaws. The 3-positions switch allows to rise it, lower it and block it. The anchoring plate is completely perforated to facilitate the installation of various types of equipment. It is possible to adjust the limit switch both when rising and lowering.

Technical features

- **Sturdy structure** thanks aluminium and steel profiles which confer both lightness and sturdiness. The structure is partially painted in metallic grey and partially galvanized
- **Pantograph opening/closing system** in galvanized steel
- **Support case** totally perforated to facilitate anchoring and make the bracket compatible with the majority of projectors on the market
- **Movement** ensured by a **mono-phase electrical motor**, absolutely reliable, class II, double insulation with self-resetting thermal protection which stops the motor in case the regular operating temperature is exceeded. The motor is IMQ and CE certified, with **5 years warranty** from the date of purchase.
- **Standard up/down** electrical bracket's inverter
- **Lowering and raising limit switch** factory adjusted, possibility of further different adjustments if needed. Possibility to stop the bracket at intermediate heights, by acting on the electrical inverter
- **Power supply:** 230V / 50 Hz
- **Maximum consumption:** 65W
- **Maximum load capacity:** 15 Kg
- **CE certified product**, total warranty of **36 months**, at the conditions indicated in the user and maintenance manual

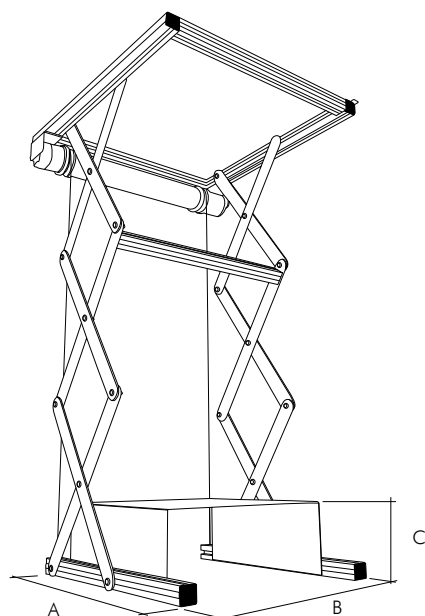

Barcode	Model	MAX	55x53x16	55x53x105	34x40x15,5	60x60x28	13	15,3
604394	VIDEOLIFT 90	MAX 89	55x53x16	55x53x105	34x40x15,5	60x60x28	13	15,3
604395	VIDEOLIFT 200	MAX 200	55x53x30	55x53x230	34x40x15,5	60x61x28	17,2	20
604396	VIDEOLIFT HT	MAX 100	84x84x16	84x84x105	64x64x13,5	74x90x28	17,7	19
ACCESSORIES AND SPARE PARTS								
090015	HOME REMOTE RADIO CONTROL (receiver + transmitter) range up to 60m						-	0,20
090000	INTEO RADIO CONTROL (receiver + transmitter) range up to 200 m						-	0,20
090006	INVERTER at fixed positions with stop button, switch to be mounted on the wall						-	0,10

Size in cm, weights expressed in kilograms, diagonal expressed in inches (")

In this page, motorized projector's bracket VIDEOLIFT: In the large picture VIDEOLIFT 604394 is shown in the open working position; in the small pictures from the left VIDEOLIFT in the closed position, and close up of the lifting cable winding system.