

FLAT ELASTIC WRAP AROUND



FLAT ELASTIC WRAP AROUND is a smart solution for fix installations both in professional, corporate and Home Cinema environments.

This new product is based on an edge less fixed frame screen that allows to achieve a


perfect, neat and design result, combining the best projection performances together with the most demanding architectural needs.

Available in 1:1, 4:3, 16:9, 16:10 ratios and bespoke sizes.



- Total frame screen dimension is the same as the viewing area
- Total frame depth including wall mounting brackets: 33 mm.
- Smart design and easy to install
- Wall mounting brackets included
- Wall mounting brackets on upper and lower frame for SAFE installation
- Fixing brackets are NOT VISIBLE once the screen is mounted onto the wall
- Easy and quick fixing of the projection surface to the rear side of the frame with galvanized rods and rubber bands
- Flame retardant projection surfaces – classification M1 and B1

TECHNICAL SPECIFICATIONS

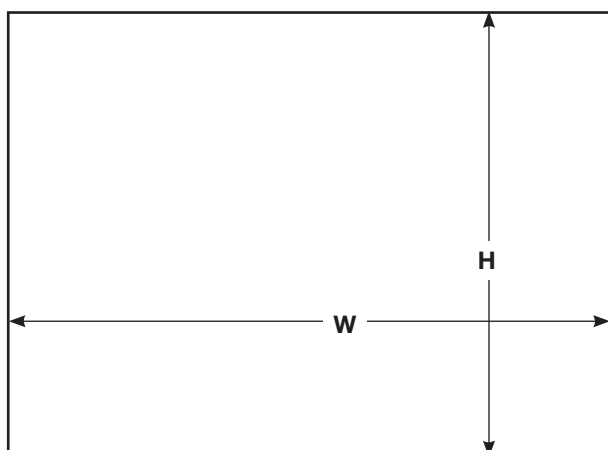

Anchoring system - Rear side view



Glance to the corner - Front side view

TECHNICAL SPECIFICATIONS

1:1 Ratio Viewing area (WxH)	4:3 Ratio Viewing area (WxH)	16:9 Ratio Viewing area (WxH)	16:10 Ratio Viewing area (WxH)	Front projection surfaces		Approx. net weight
cm. 160x160	cm. 160x120	cm. 160x90	cm. 160x100	White	gain 1.2	Kg. 11
cm. 180x180	cm. 180x135	cm. 180x101	cm. 180x112	White Pearl	gain 1.2	Kg. 13
cm. 200x200	cm. 200x150	cm. 200x112	cm. 200x125	Lumi Grey	gain 0.8	Kg. 14
cm. 220x220	cm. 220x165	cm. 220x124	cm. 220x137	Cinesound	gain 0.7	Kg. 16
cm. 250x250	cm. 250x190	cm. 250x140	cm. 250x156	Foldaway	gain 1.5*	Kg. 19
cm. 300x300	cm. 300x225	cm. 300x169	cm. 300x187			Kg. 23
	cm. 350x265	cm. 350x197	cm. 350x219			Kg. 27
	cm. 400x300	cm. 400x225	cm. 400x250			Kg. 31