


PERFECT MATCH FOR UST PROJECTOR / LASER TV

MOTORIZED TENSIONED ALR SCREEN - AJ

Premium Ambient Light-Rejecting Technology



ADVANTAGE FRIENDLY FEATURES

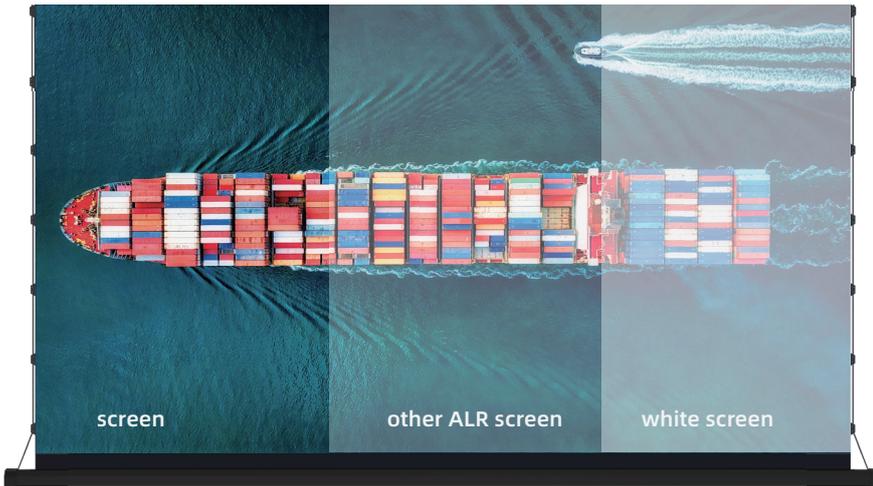

BRIGHTER & BETTER

With 3D nano coating which combines the contrast and gain perfectly reaching 20000:1 cinema standard. With a nearly perfect viewing angle of 178° and big size range (100"-120"), it is capable of being viewed from extreme off axis positions even during day time with ambient light. When compared with normal matte white screen and other ALR fabric, the picture comes alive and maintains the contrast of the projector.

Wireless 868MHz Control System

Connection Port Function:

1. RS 485/RS 232
2. DC AMX
3. Wired trigger
4. Voltage AC 90V-240V




Flatness

Rollable and Tensioned design, stretch the fabric from four sides and reach 2.5Kg/m² for the bottom roller. Each side is adjustable to reach your desired flatness which make sure the image perfectly compared with regular electric screen which.



Silent tubular motor

Adopts a silent tubular motor certificated by UL, 3C. Stable and safe operation.

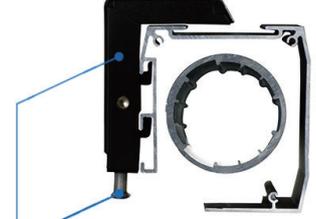

Locking fixture

Ceiling Recessed Mount

Independently hanging bracket, can be adjusted left and right, after adjusting the best position, lock it. Safe and quick installation



868MHz IR control both




Sny-Trigger, screen turn on/off at the same time with projector (Sold separately)

Economic Motorized A LR Screen size »


*Unit:mm

| FORMAT | DIAG.SIZE | VIEWING AREA (WxH) | BLACK BORDER | | | SCREEN OVERALL LENGTH | SCREEN OVERALL HEIGHT | PACKAGE DIMENSIONS W1xH1xL1 | APPROX. WEIGHT | | NOTE |
|--------|-----------|-----------------------|--------------|------------|--------|-----------------------|-----------------------|--------------------------------|----------------|--------|------|
| | | | Top(B1) | Bottom(B2) | L/R(A) | L | B | | Kg | Lbs | |
| 16:9 | 100" | 2214x1245 | 400 | 50 | 60 | 2678 | 1846 | 170x220x2761 | 22.30 | 49.16 | |
| | 110" | 2435x1370 | 400 | 50 | 60 | 2899 | 1971 | 170x220x2982 | 23.60 | 52.03 | |
| | 120" | 2657x1495 | 400 | 50 | 60 | 3121 | 2096 | 170x220x3204 | 25.00 | 55.12 | |
| | 135" | 2984x1688 | 400 | 50 | 60 | 3471 | 2358 | 235x235x3791 | 42.17 | 92.97 | |
| | 150" | 3320x1868 | 400 | 50 | 60 | 3857 | 2538 | 235x235x4177 | 46.10 | 101.63 | |
| 16:10 | 100" | 2154x1346 | 400 | 50 | 60 | 2618 | 1947 | 170x220x2701 | 21.75 | 47.95 | |
| | 110" | 2370x1480 | 400 | 50 | 60 | 2834 | 2081 | 170x220x2917 | 23.40 | 51.59 | |
| | 120" | 2585x1616 | 400 | 50 | 60 | 3049 | 2217 | 170x220x3132 | 25.00 | 55.12 | |
| | 140" | 3010x1890 | 400 | 50 | 60 | 3385 | 2560 | 235x235x3867 | 45.37 | 100.02 | |


Dimension Chart »

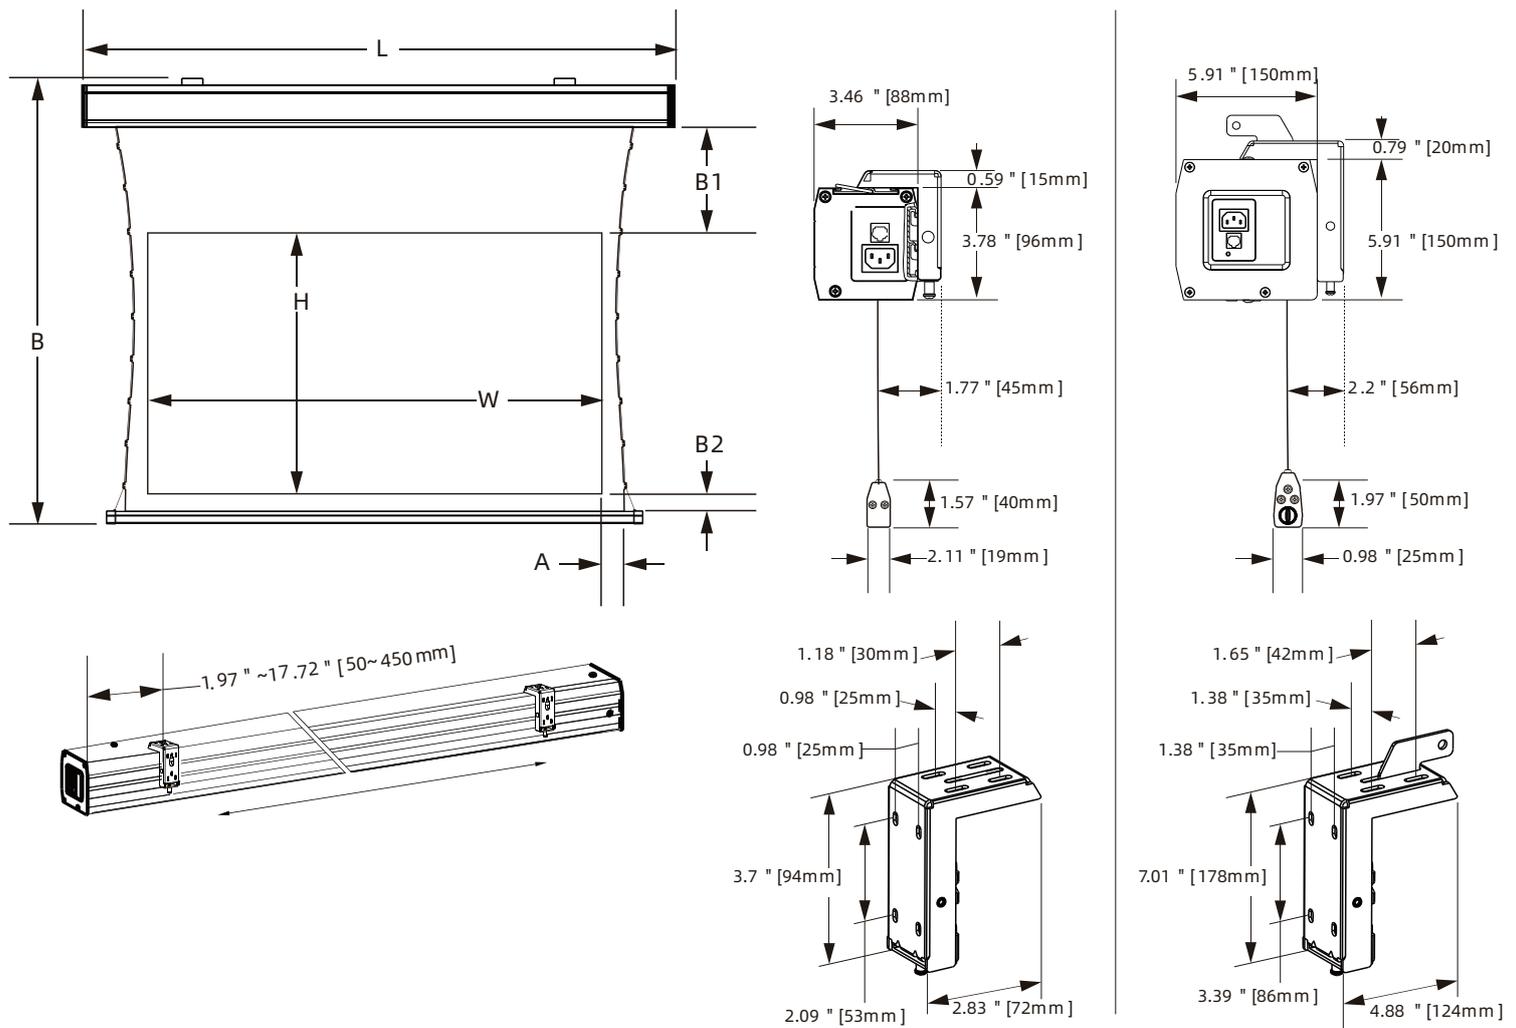


Installation

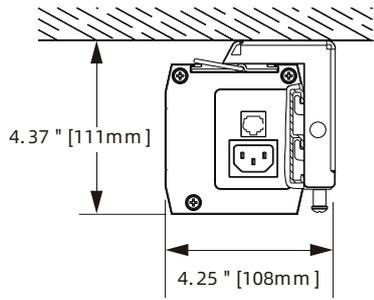


Ceiling mount

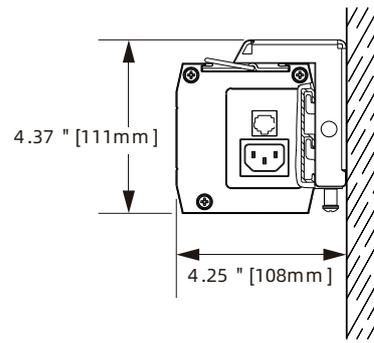


Wall mount

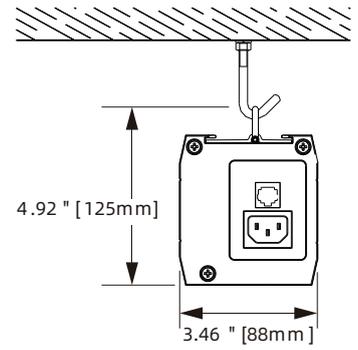


Hoisting

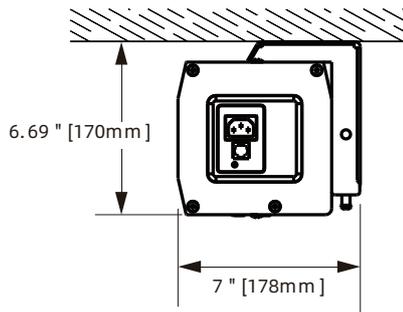

Ceiling mount

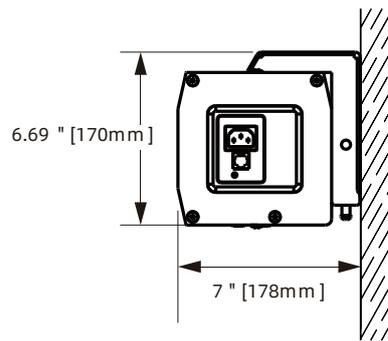

Wall mount

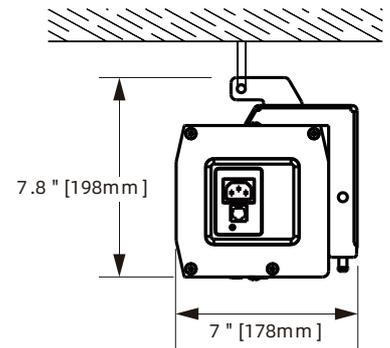

Hoisting